



# Sound/Speaker System Battery

## 6FM18 (12V18Ah)




LONGWAY speaker batteries are designed and developed according to the characteristics of instant large current, deep discharge, easy over-discharge and high-frequency vibration required in the use of speaker. The product has the advantages of long cycle life, good performance of large current discharge, low self-discharge rate, strong recovery ability of over-discharge, strong anti-vibration ability, etc., which can meet the special performance requirements of speaker batteries. Products pass UL, CE, RoHS certification, and can be shipped by sea or air.



General Feature	Applications
<ul style="list-style-type: none"> <li>High reliability, safe without leakage, can be used in any position</li> <li>Excellent recovery performance after deep discharge</li> <li>Environmentally friendly products Meet EU battery directive RoHS and REACH standards</li> <li>Maintenance free</li> <li>Widely applicable temperature range, can be used at -20°C~60°C</li> <li>Low self-discharge rate. The average monthly self-discharge rate of the battery is less than 2.5% (It is recommended to recharge after storage for 6 months or before use)</li> </ul>	<ul style="list-style-type: none"> <li>Outdoor battery speaker</li> <li>Portable video speaker</li> <li>Outdoor song on-demand stereo</li> <li>Wireless Bluetooth speaker</li> <li>Wireless line array speaker</li> <li>Square dance speaker</li> <li>And company meeting, wedding hosting, outdoor activities and other audio</li> </ul>

Performance	Dimensions												
Nominal Voltage 12V (6cell)	<table border="1"> <tr> <td>Length</td> <td>181mm</td> <td>7.13inch</td> </tr> <tr> <td>Width</td> <td>77 mm</td> <td>3.03inch</td> </tr> <tr> <td>Height</td> <td>166mm</td> <td>6.57inch</td> </tr> <tr> <td>Total height</td> <td>166mm</td> <td>6.57inch</td> </tr> </table>	Length	181mm	7.13inch	Width	77 mm	3.03inch	Height	166mm	6.57inch	Total height	166mm	6.57inch
Length		181mm	7.13inch										
Width		77 mm	3.03inch										
Height		166mm	6.57inch										
Total height		166mm	6.57inch										
Capacity @25°C													
20hr Rate (0.90A) 19.3Ah @ to 1.75V/cell													
3hr Rate (4.50A) 13.5Ah @ to 1.70V/cell													
27min Rate (18.0A) 10.5Ah @ to 1.60V/cell													
Weight Approx (5.30 ± 3%)kg (11.68lbs)													
Internal Resistance Approx 12.5mΩ fully charged @25°C													
Maximum Discharge Current 144A(3sec)													
Terminal F5													
Operating Temperature Range Discharge:-20°C~60°C; Charge:0°C~50°C Storage:-20°C~40°C													
Container Material ABS(UL94 HB)/UL94-V0 Optional													

Battery use
<b>Cycle use</b> <ol style="list-style-type: none"> <li>Limit the initial charging current to no more than 5.40A</li> <li>Keep charging voltage at 14.40-15.00 V/unit, and continue charging at least 3 hours after the charging current reduces to 0.36A to ensure full charge</li> <li>The compensation coefficient of charging voltage and temperature is -5mv/cell / °C</li> </ol>
<b>Float use</b> <ol style="list-style-type: none"> <li>Limit the initial charging current to no more than 5.40A</li> <li>Keep charging voltage at 13.50-13.80 V/unit. When the voltage reaches the constant voltage the current gradually decreases until the battery is fully charged and continues to charge</li> <li>The compensation coefficient of charging voltage and temperature is -3mv/cell / °C</li> </ol>




 Kaiying Power Supply & Electrical Equip Co., Ltd    Email: [sales@longwaybattery.com](mailto:sales@longwaybattery.com)  
 Tel:0595-68782266 Fax:0595-68782222    Website: <http://www.longwaybattery.com>  
 Add: Kaiying Industrial Area, Chengxiang Town, Anxi, Quanzhou, Fujian Province, China  
 KY-IOP-LW12-18D B0.May 2023


Note: This information usually describes use only and is not intended to make any warranties or promises regarding the battery, Battery specifications and battery design are subject to change without prior notice. Please contact LONGWAY Battery for the latest information




# Sound/Speaker System Battery

## 6FM18 (12V18Ah)


### Floating Charging Life VS Temperature

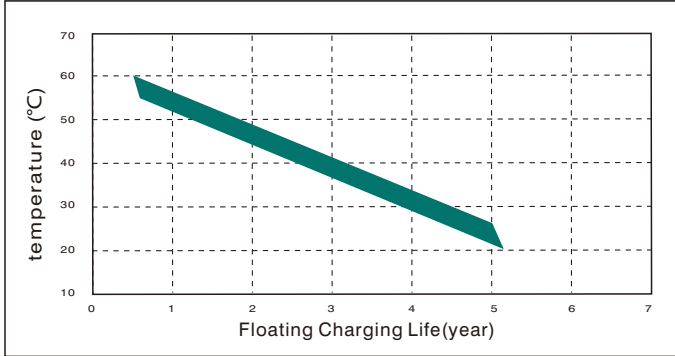


### Floating Charging Characteristics Diagram

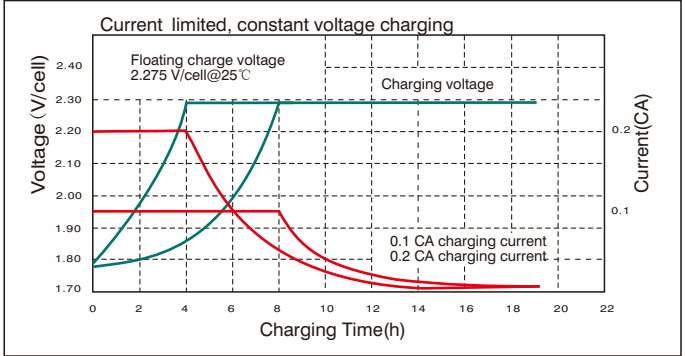


### Cycle Life

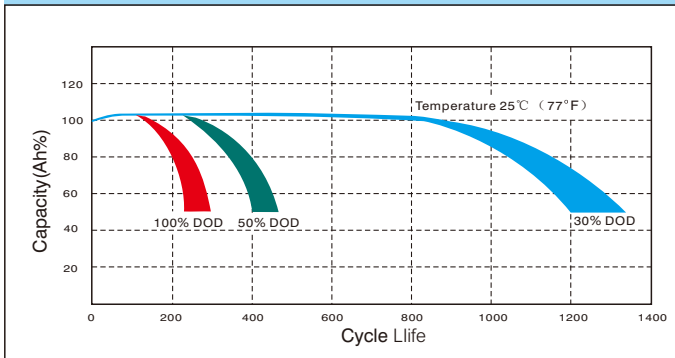


### Cycle charging characteristic diagram

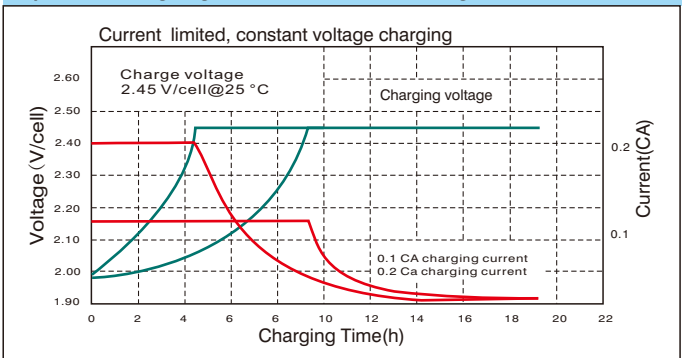

### Temperature and capacity characteristics

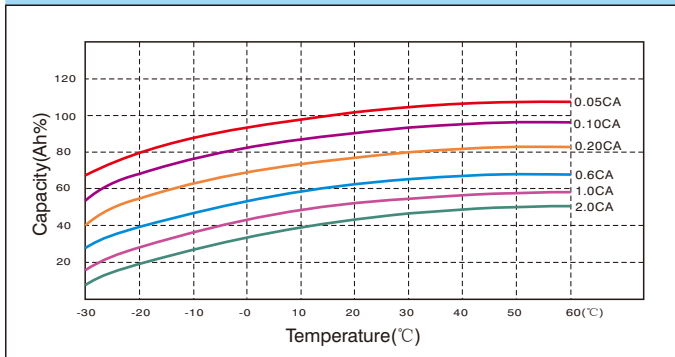

### Self-discharge characteristic

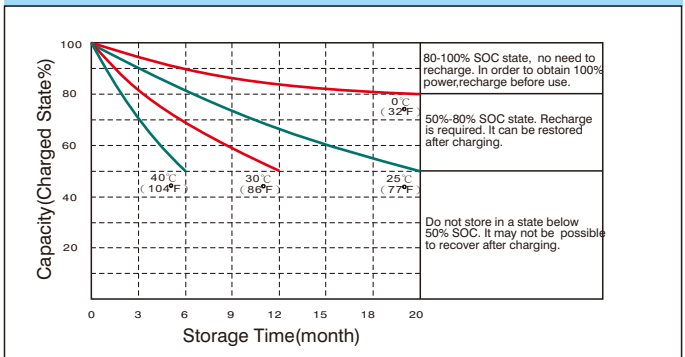

### Constant current characteristics(A,25°C )

F.V/TIME	5min	10min	15min	30min	60min	90min	2h	3h	5h	10h	20h
9.60	77.4	45.0	34.2	21.2	11.2	8.37	6.76	5.12	3.38	1.83	0.95
9.90	75.1	43.7	33.2	20.6	10.8	8.20	6.69	5.07	3.35	1.82	0.95
10.2	73.5	42.8	32.8	20.4	10.7	8.04	6.66	5.04	3.33	1.81	0.94
10.5	71.2	41.4	31.5	19.5	10.3	7.87	6.59	4.99	3.30	1.80	0.94
10.8	69.1	40.2	31.2	19.4	10.2	7.70	6.53	4.94	3.26	1.80	0.94

### Constant power discharge characteristic ( W,25°C )

F.V/TIME	5min	10min	15min	30min	60min	90min	2h	3h	5h	10h	20h
9.60	864	508	390	243	129	97.9	79.1	60.8	40.4	21.9	11.4
9.90	838	492	378	236	125	96	78.3	60.2	40.0	21.8	11.3
10.2	821	482	374	234	124	94	77.9	59.9	39.8	21.7	11.3
10.5	795	467	359	224	119	92.1	77.1	59.3	39.4	21.6	11.3
10.8	771	453	356	222	118	90.1	76.4	58.7	39.0	21.6	11.2



Kaiying Power Supply & Electrical Equip Co., Ltd Email: [sales@longwaybattery.com](mailto:sales@longwaybattery.com)  
 Tel:0595-68782266 Fax:0595-68782222 Website: <http://www.longwaybattery.com>  
 Add: Kaiying Industrial Area, Chengxiang Town, Anxi, Quanzhou, Fujian Province, China  
 KY-IOP-LW12-18D B0.May 2023

Note: This information usually describes use only and is not intended to make any warranties or promises regarding the battery, Battery specifications and battery design are subject to change without prior notice. Please contact LONGWAY Battery for the latest information